


INSULATED GLASSFIBRE INDUSTRIAL LADDERS



- ▶ Approved to EN131 - max safe load 150kg (23.5stones) and heavier duty than our TRADE models.
- ▶ Remarkably well built insulated ladders, fully GS & TUV tested and approved to EN131 at a competitive price.
- ▶ **Rope Operated** 2 Section models with large swinging gravity latch and single rope and pulley fitted.
- ▶ Features orange glassfibre channel section side stiles and large flat-top "D" shaped (40mm deep) alloy rungs fitted at 12" centres to American design.
- ▶ Unique fitting of alloy rungs - rungs are joined to large aluminium plates and rivetted to side stiles with four solid rivets. Damaged rungs can be factory replaced so avoiding the costly replacement of the complete ladder.
- ▶ All models fitted at the base with large swivel safety feet including a slip resistant base. Also have steel point for soft ground use when rotated.

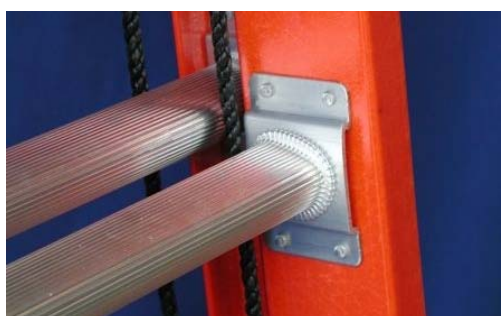

INDUSTRIAL GLASSFIBRE SAFETY ROPE-OP LADDERS to EN131 (150kg)				
Code	Closed Height	Max Extended Height	No. Rungs per sectn	Appx Weight
2 SECTION ROPE-OPERATED				
TF58020	3.0m / 10' 0"	5.1m / 16' 6"	2 x 10	21kg
TF58024	3.6m / 12' 0"	6.3m / 20' 5"	2 x 12	25kg
TF58028	4.3m / 14' 0"	7.5m / 24' 4"	2 x 14	28kg
TF58032	4.8m / 16' 0"	8.4m / 27' 3"	2 x 16	34kg
TF58036	5.5m / 18' 0"	9.3m / 30' 2"	2 x 18	37kg
TF58040	6.1m / 20' 0"	10.2m / 33' 2"	2 x 20	40kg
Delivered to all of mainland UK				

See our excellent website at
www.ladders999.co.uk
 for our huge range
 of ladders, steps, podium steps
 and scaffold towers



UNITS 2 & 10 CHANCEL CLOSE TRADING ESTATE
 EASTERN AVENUE **GLOUCESTER** GL4 3SN
 FAX : 01452 505580
TEL: 01452 520144