

INDUSTRIAL ALLOY **ACCESS LADDERS**



- ▶ Robustly constructed from industrial duty aluminium for regular access to mezzanine floor storage areas etc.
- ▶ Note - these are ladders, not stairs, so descent is made facing inwards to the ladder.
- ▶ Channel section side stiles fitted with 3" / 80mm deep non-slip treads at a standard rise of 250mm & set at 67°.
- ▶ Overall ladder width normally 600mm but can be made to customer's required dimensions.
- ▶ Heights to suit customer's dimensions.
- ▶ Standard models fitted with shafting hooks at the top for hooking over rails and rubber feet at base. Can also be fitted as optional extra with alloy angle brackets top and bottom for permanent bolting to floor & wall.
- ▶ Optional robust handrails - can be supplied without any, or with handrail one side only or both sides. Handrails can be Loop Handrails as illustrated or plain, running parallel to ladder with no extension above.
- ▶ Quotations provided on request, for bespoke specials to suit your own dimensions.



UNITS 2 & 10 CHANCEL CLOSE TRADING ESTATE
EASTERN AVENUE **GLOUCESTER** GL4 3SN
FAX : 01452 505580

TEL: 01452 520144

www.ladders999.co.uk sales@lansfordaccess.co.uk


INDUSTRIAL ALLOY **ACCESS LADDERS**

▶▶ Height to suit

▶▶ Handrails to suit

▶▶ Width 600mm or to suit

▶▶ Shafting Hooks or Fixing Brackets to suit

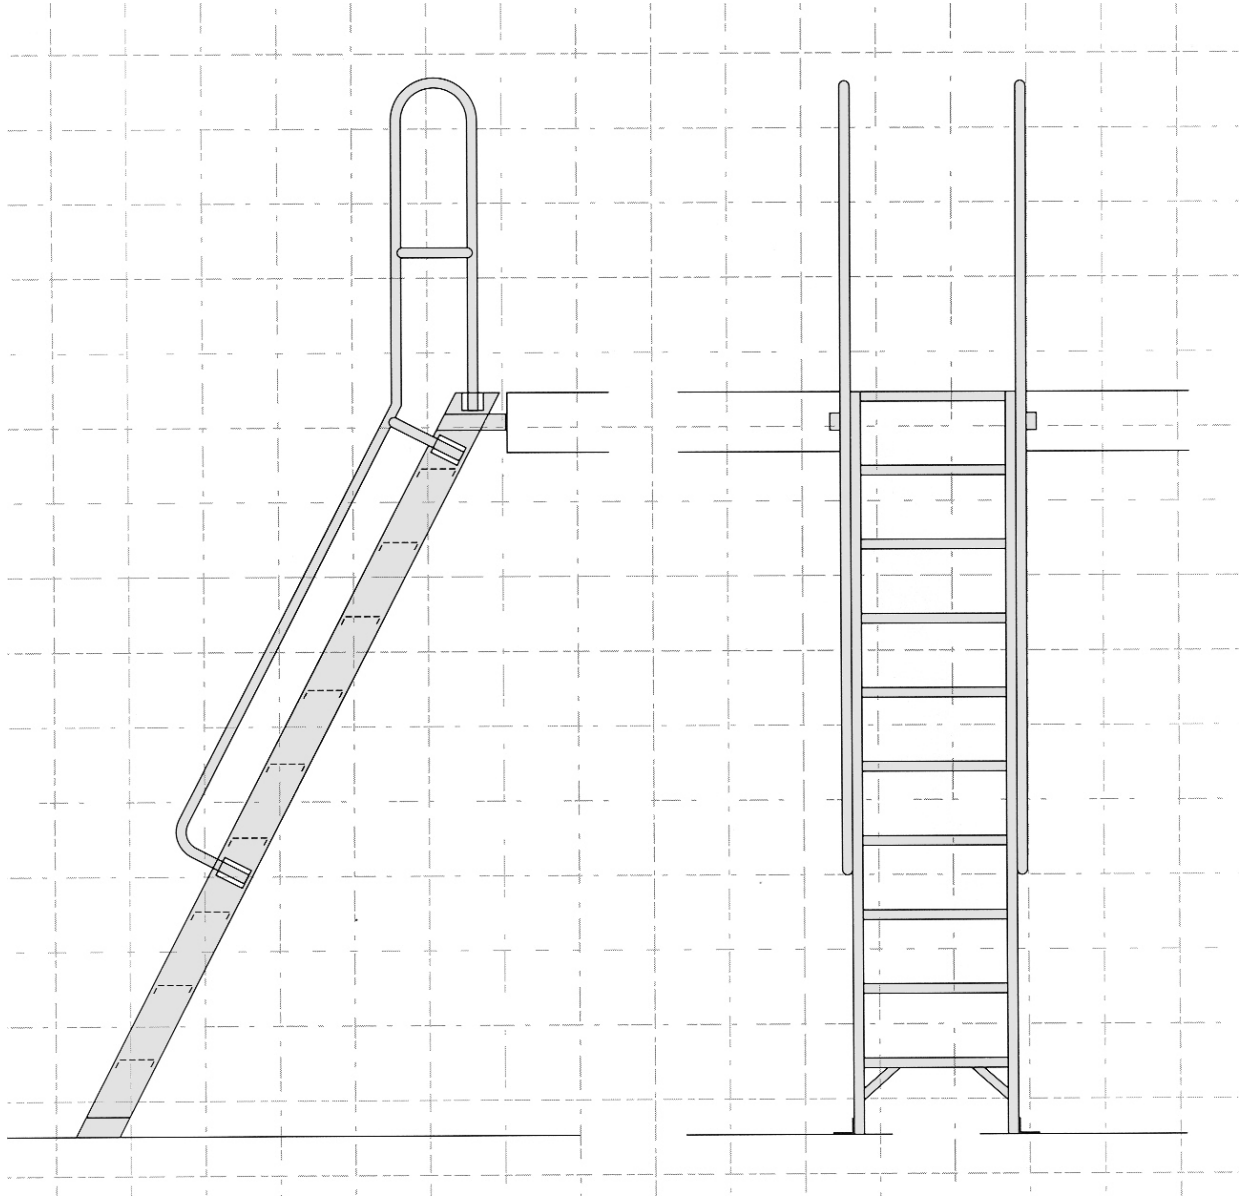

Quantity	Floor to Floor Height? (vertical drop)	Overall Ladder Width? (standard 600mm) options 500mm or custom width [handrails add 40mm/side]	Handrails Fitted? Both sides; One side (R/H or L/H?); None.	Handrail Type? Top Loop (as above) or Standard type?	Secured by - Shafting Hooks fitted? Fixing Brackets fitted?

Please indicate if there are any restrictions on distance of ladder base from wall or upper attachment point.
Typically this will be 0.8m - 1.8m depending on Floor to Floor height.