

FREESPACE TIMBER LOFT LADDER



- ▶ A 3-part folding timber loft ladder offering exceptional value for money and safe comfortable access to your loft.
- ▶ Ladder sections are mounted on trapdoor and fold on top of each other so do not protrude into loft space when closed.
- ▶ Supplied mostly assembled (requires minor bolting & screwing into pre-drilled holes - simple!).
- ▶ Complete with timber frame and draughtproofed trapdoor with 20mm insulation. Lower face of trapdoor in white finish.
- ▶ Dual spring support for smooth and easy operation.
- ▶ Fits any ceiling height up to 2.87m. (9' 5"). Ladder can be trimmed for lower heights.
- ▶ Ceiling hole needs to be cut to suit (appx 1200 x 600mm). We suggest this is done AFTER ladder is received.
- ▶ Maximum width of boxes etc which will pass between hatch support arms 420mm.
- ▶ Red metal handrail supplied as standard - these only fit top section of ladder.
- ▶ Operating pole supplied.
- ▶ Maximum safe load 150kg (23.5stones).



One red metal Handrail is supplied with every Freespace loft ladder for increased user confidence.

Handrail extends along top section only on left or right.




Optional extra - timber balustrade to fit around aperture in floor for greater safety (code: TLBAL1 in "Exclusive" price list on website).



FREESPACE TIMBER LOFT LADDER

Model Code	Maximum Ceiling Height (A)	Max Landing Space (B)	Max Swing Clearance (C)	Casing Size (Unit Plan Size) L x W (D)	Opening Size L x W (E)	Casing Height (F)	Overall Height (G)	Ladder Angle (H)	No. Treads
TLLFR1	2870mm	1380mm	1640mm	1175 x 580mm	1200 x 600mm	90mm	321mm	68°-74°	12

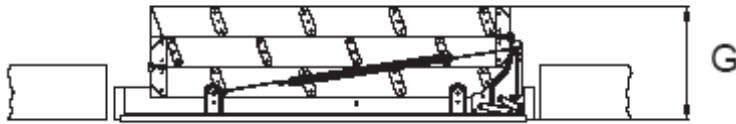

G

Casing

Material: Spruce
 Thickness: 28 mm x Height: 90 mm
 The lower edge of the casing is rebated and has a draught excluder which ensures tight closing.

Trapdoor

Material: 20 mm spruce frame, 20 mm insulation and white finish underside. Brown finish upper face.
 Thickness: 26 mm
 Insulation: 20 mm polystyrene
 Insulation coefficient: 1.31 W/m² °C

Ladder

Material: Spruce stiles and treads
 Width: 400 mm
 Tread to tread height: 250 mm

Tread dimensions

Thickness: 28 mm x Depth: 82 mm
 All treads have a non-slip surface
 Treads dowelled into side stiles

Side stile dimensions

Thickness: 28 mm x Depth: 84 mm


Handrail

Colour: red
 Material: epoxy coated steel
 Location: fits to top ladder section only

Requires no clearance in loft. The three ladder sections fold onto the trapdoor and store within the framework

and . . .

Exceptional value for money!

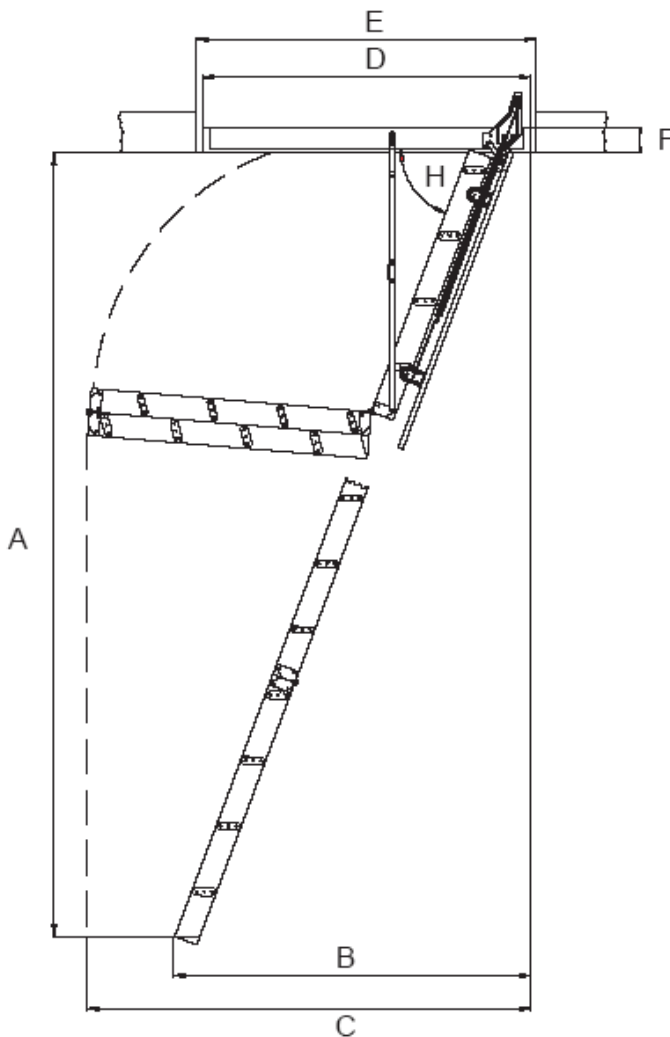

A current, detailed
price list

can be printed from our web site

www.ladders999.co.uk

Please order at our national sales office in Bristol



HEAD OFFICE (HIRE & SALE)
 UNIT 10 CHANCEL CLOSE
 EASTERN AVENUE
GLOUCESTER GL4 3SN
 FAX : 01452 308369

NATIONAL SALES OFFICE -
 8A EAST PARK TRAD ESTATE
 GORDON ROAD FISHPONDS
BRISTOL BS5 7DR
 FAX : 0117 951 5682

TEL: 01452 520144

TEL: 0117 935 4664

www.ladders999.co.uk sales@lansfordaccess.co.uk

All prices, details and specifications are subject to change without notice and are those ruling at date of order. E&OE.