# TRADE CONSERVATORY ROOF LADDER



### Low Cost

### Lightweight

### Versatile

### **IDEAL FOR USE BY**


- Conservatory installers
- » Home owners
- Maintenance contractors
- Window cleaners

#### **SPECIAL FEATURES**

- A sturdy solution for conservatory roof access problems.
- Lower spec than our Professional model but a much lower price tag makes it ideal for less rigorous and lower frequency use.
- Suitable for all popular roof configurations and fits most conservatories.
- Quick to assemble and adjust for roof heights up to 2.5m and slopes up to 45° max.
- Bespoke special made to order.

## TRADE CONSERVATORY ROOF LADDER



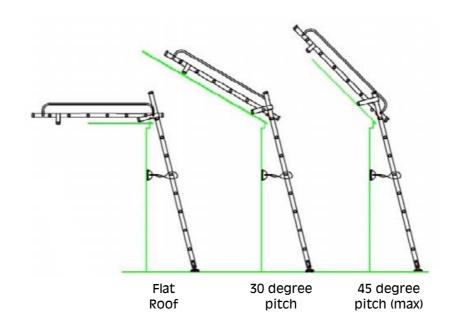

TRADE CONSERVATORY ROOF LADDER				
CODE	Suits Eaves Heights	Suits Roof Pitch Lengths	Suits Roof Pitch Angles	Appx Weight
CCL1	2.4 - 2.6m	2.0m +	10º - 45º	14kg

#### **TECHNICAL SPECIFICATION**

- Quick to assemble and adjust for roof heights up to 2.5m and slopes up to 45° max.
- Suction Cup & quick tension strap secure ladder to windows for extra safety.
- Non-marking rubber covered bearers are 1.0m wide and rest on roof glazing bars.
- Anti-slip articulating rubber feet at base.
- Unlike Professional model, does not include kneeling platform or base levelling facility.
- Two ladder sections main access ladder is 2.8m long & 500mm wide. Top roof ladder is 2.0m long & 420mm wide with rubber covered, nonmarking bearers 1.0m wide.
- Max safe load 150kg



FAX : 01452 505580 TEL: 01452 520144

www.ladders999.co.uk sales@lansfordaccess.co.uk


National Sales Office - Units 2 & 10, Chancel Close Trading Estate, Eastern Avenue, GLOUCESTER GL4 3SN

## TRADE CONSERVATORY ROOF LADDER



spigot joints allow shorter sections for more compact transport & storage



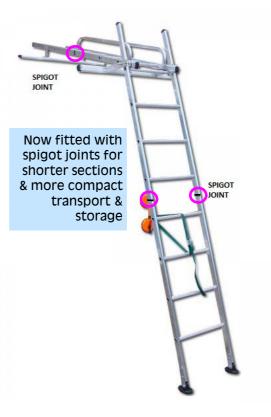

- » Designed for single user maintenance tasks.
- » Standard models suitable for eaves heights up to 2.5m
- » Extension pieces can be supplied as a factory fitted option.
- » Top outrigger easily adjusts to suit roof angle.
- 1.0m long bearer bars fitted with non-marking white PVC sleeves.
- » Supplied with glazing suction pad and webbing straps to secure base ladder section.
- » 150kg maximum safe load.
- » Now jointed to allow extension pieces to be retrofitted. Please enquire.

FAX: 01452 505580 TEL: 01452 520144 www.ladders999.co.uk

sales@lansfordaccess.co.uk

National Sales Office - Units 2 & 10, Chancel Close Trading Estate, Eastern Avenue, GLOUCESTER GL4 3SN