


LADDERFRAME INDUSTRIAL ALLOY TOWERS



Approved
ISO 9001
BS EN 1004

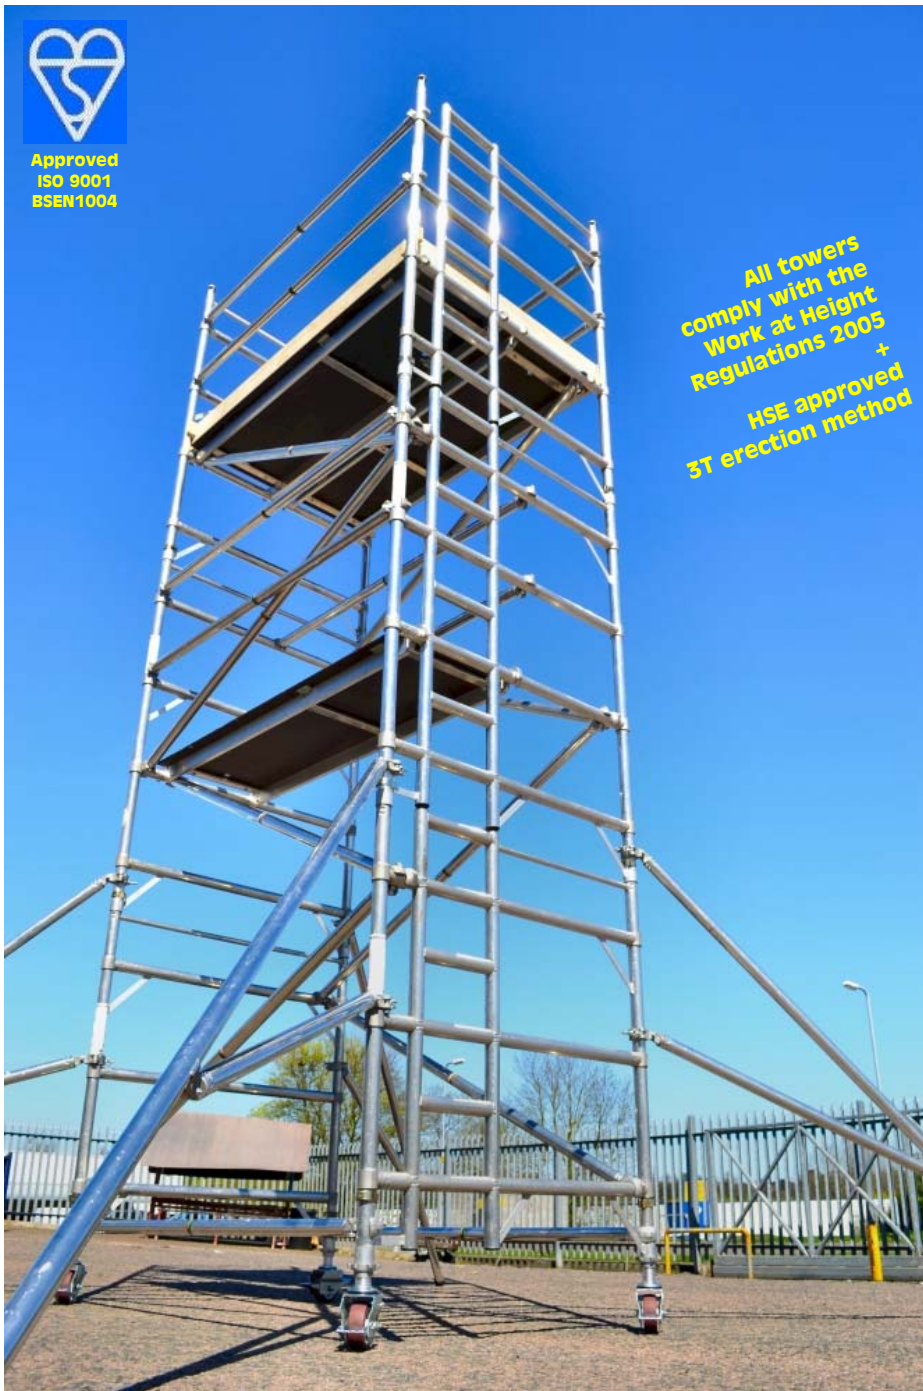

All towers
comply with the
Work at Height
Regulations 2005
+
HSE approved
3T erection method

LADDERFRAME industrial alloy towers offer a safe means of access in all situations.

Platform levels can be varied in height at approximately 500mm/ 1'7" intervals, ensuring a comfortable working height wherever the job.

LADDERFRAME towers are full industrial duty & robustly UK manufactured from 50mm diameter alloy tube to a certified ISO9002 quality system for regular tough use and compliance with all current Health & Safety regulations.

- ▶ **LADDERFRAME design has vertical ladders built-in to tower frames.** This ensures access ladders cannot be lost or forgotten and also ensures that operatives use the safety of ladder access.
- ▶ All frames are interchangeable as lowers, uppers or guardrail frames without modification or additional components. Special guardrail frames are *NOT* required.
- ▶ Correct guardrail height is guaranteed when guardrail braces are fitted to the two rungs above platform level.
- ▶ All towers tested, approved & Kitemarked to British & European standard BS EN1004 (previously known as HD1004).
- ▶ Also supplied with all components to comply with the Work at Height Regulations 2005 and HSE approved 3T erection method.
- ▶ Maximum safe working load of 750kg per tower and 250kg per platform level.
- ▶ Platform heights to 12m /40ft
- ▶ Choice of three lengths - 2.0m (6ft) or 2.5m (8ft) or 3.0m (10ft)
- ▶ Choice of two widths - 1.35m (4'5") Double Width or 0.72m (2'5") Single Width



Double Width towers are 1.35m wide, giving space for tools, materials and personnel.

Taller towers are fitted with extra trapdoor platforms and guardrails where required to ensure compliance with the HSE approved 3T (Through-The-Trap) erection method.

LADDERFRAME INDUSTRIAL ALLOY TOWERS



Approved
ISO 9001
BS EN 1004

Single Width towers are ideal in tight spaces.

At just 0.72m wide they will fit in many areas where a Double Width tower will not.

Ladderframe towers are the lowest cost and most popular design of industrial alloy towers.

Ladders are built-in to the tower frames, ensuring ladders are not lost or forgotten.

Ladderframe industrial towers are perfect for safe working in most locations.

Robustly manufactured from 50mm diameter alloy tube to a certified ISO9002 quality system and approved to BS EN1004. All towers comply with the Work at Height Regulations 2005 and 3T erection method.



CASTORS
Heavy-Duty locking castors are approved to BS EN1004 with a maximum static load 600kg per castor. Adjustable Legs give 300mm of adjustment for levelling.



BRACES
colour coded braces for easy identification



HOOK
full strength profile to reduce damage



CRIMPING
ten indent configuration to resist tension & torque loads



PLATFORM
plywood decking coated with non-slip mesh phenol film



ADJUSTABLE LEG
coarse thread for rapid height adjustment & levelling



SPIGOT
cast aluminium for maximum durability & strength




STABILISERS
Stabilisers clamp to towers with captive bolts and wing nuts. No tools required.




 **LANSFORD**
ACCESS LTD


LADDERFRAME COMPONENTS

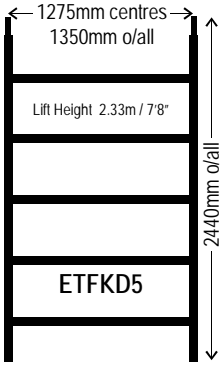


5 RUNG D/W FRAME
Weight: 9.0kg



4 RUNG D/W FRAME
Weight: 7.0kg




3 RUNG D/W FRAME
Weight: 5.0kg




2 RUNG D/W FRAME
Weight: 4.0kg


**DOUBLE WIDTH
SPAN FRAMES**
o/all width 1350mm




D/W GUARDRAIL FRAME
Weight: 3.0kg

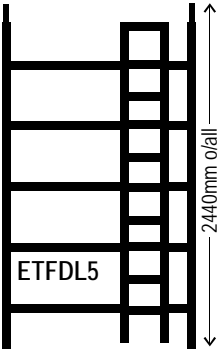

5 RUNG D/W
LADDERFRAME
Weight: 15.0kg





4 RUNG D/W
LADDERFRAME
Weight: 12.0kg




3 RUNG D/W
LADDERFRAME
Weight: 9.0kg


**DOUBLE WIDTH
LADDERFRAMES**

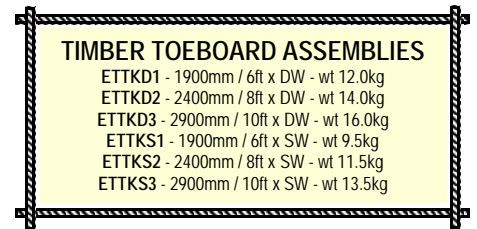

5 RUNG S/W
FRAME
Weight: 7.0kg

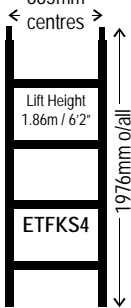


4 RUNG S/W
FRAME
Weight: 5.0kg




3 RUNG S/W
FRAME
Weight: 4.0kg




S/W GUARDRAIL
FRAME
Weight: 3.0kg



5 RUNG S/W
LADDERFRAME
Weight: 13.0kg



4 RUNG S/W
LADDERFRAME
Weight: 10.0kg




3 RUNG S/W
LADDERFRAME
Weight: 7.0kg

**SINGLE WIDTH
SPAN & LADDERFRAMES**
o/all width 720mm



PLAIN PLATFORMS

ETPKP1 - 1900mm hook ctr - wt 16.0kg
ETPKP2 - 2400mm hook ctr - wt 20.0kg
ETPKP3 - 2900mm hook ctr - wt 24.0kg



TRAPDOOR PLATFORMS

ETPKT1 - 1900mm hook ctr - wt 16.0kg
ETPKT2 - 2400mm hook ctr - wt 20.0kg
ETPKT3 - 2900mm hook ctr - wt 24.0kg

PLATFORMS



BRACES

HORIZONTAL BRACES

ETBKH1 - 1900mm hook ctr - wt 1.7kg
ETBKH2 - 2400mm hook ctr - wt 2.0kg
ETBKH3 - 2900mm hook ctr - wt 2.5kg



DIAGONAL BRACES

ETBKD1 - 2115mm hook ctr - wt 1.7kg
ETBKD2 - 2573mm hook ctr - wt 2.0kg
ETBKD3 - 3045mm hook ctr - wt 2.5kg



CASTORS

ETK5CR - 125mm / 5" diam - wt 3.0kg
ETK6CR - 150mm / 6" diam - wt 3.5kg
ETK8CR - 200mm / 8" diam - wt 5.0kg




ADJUSTABLE LEG

ETKALA
Overall Length 600mm
Adjustment 300mm
Weight: 1.5kg

CASTORS & LEGS

LANSFORD

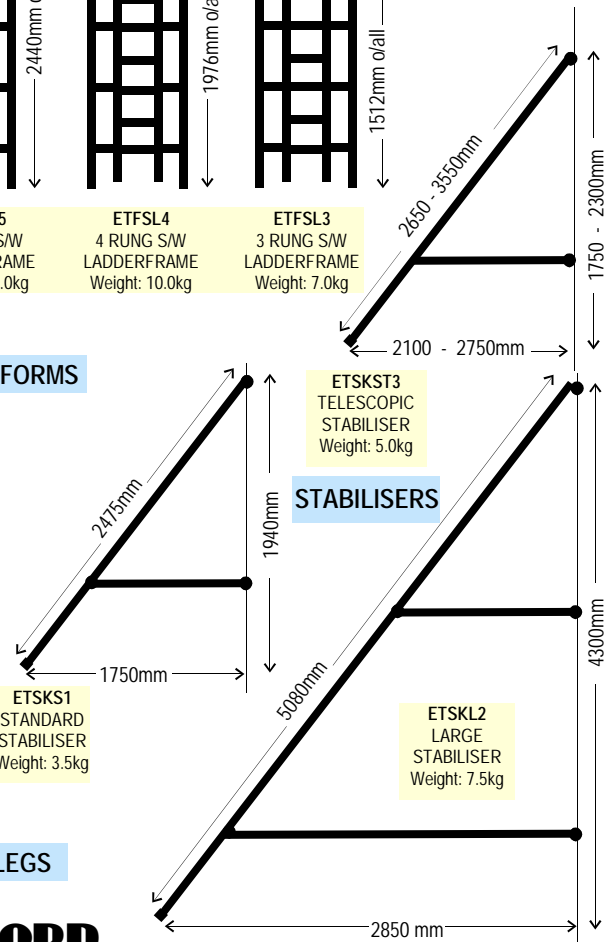

LADDERFRAME INDUSTRIAL ALLOY TOWERS

DOUBLE WIDTH (1.35m wide) LADDERFRAME ALLOY TOWERS - COMPONENTS LIST

Appx Working Height	3.41	3.88	4.34	4.81	5.27	5.73	6.20	6.66	7.13	7.59	8.05	8.52	8.98	9.45	9.91	10.37	10.84	11.30	11.77	m
Tower Height	2.66	3.13	3.59	4.06	4.52	4.98	5.45	5.91	6.38	6.84	7.30	7.77	8.23	8.70	9.16	9.62	10.09	10.55	11.02	m
PLATFORM HEIGHT	1.41	1.88	2.34	2.81	3.27	3.73	4.20	4.66	5.13	5.59	6.05	6.52	6.98	7.45	7.91	8.37	8.84	9.30	9.77	m
Top Platform on Rung	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	
Components included to comply with Work at Height Regulations 2005 and HSE 3T Erection Method. All towers kitemarked to British Standard EN1004 (2005)																				
Castor	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	Please enquire for greater heights.
Adjustable Leg	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	
3 Rung Span Frame	-	2	1	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	All towers can have alternative frame height combinations if preferred.
3 Rung Ladderframe	-	2	1	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	
4 Rung Span Frame	-	-	1	2	1	-	2	3	2	1	-	4	3	2	1	-	4	3	2	
4 Rung Ladderframe	-	-	1	2	1	-	2	3	2	1	-	4	3	2	1	-	4	3	2	
5 Rung Span Frame	1	-	-	-	1	2	-	-	1	2	3	-	1	2	3	4	1	2	3	
5 Rung Ladderframe	1	-	-	-	1	2	-	-	1	2	3	-	1	2	3	4	1	2	3	
Diagonal Brace	2	2	4	4	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	
Horizontal Brace	6	6	6	6	10	10	10	10	10	10	10	14	14	14	14	14	14	14	14	
Plain Platform	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Trapdoor Platform	1	1	1	1	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	
Standard Stabiliser	-	-	-	4	4	4	4	4	4	4	4	-	-	-	-	-	-	-	-	
Telescopic Stabiliser	-	-	-	-	-	-	-	-	-	-	-	4	4	4	4	4	4	4	4	
Toeboard Assembly	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Available in 3 tower lengths - choose from 2.0m long ; 2.5m long ; 3.0m long																				

SINGLE WIDTH (0.72m wide) LADDERFRAME ALLOY TOWERS - COMPONENTS LIST

Appx Working Height	3.41	3.88	4.34	4.81	5.27	5.73	6.20	6.66	7.13	7.59	8.05	8.52	8.98	9.45	9.91	10.37	10.84	11.30	11.77	m
Tower Height	2.66	3.13	3.59	4.06	4.52	4.98	5.45	5.91	6.38	6.84	7.30	7.77	8.23	8.70	9.16	9.62	10.09	10.55	11.02	m
PLATFORM HEIGHT	1.41	1.88	2.34	2.81	3.27	3.73	4.20	4.66	5.13	5.59	6.05	6.52	6.98	7.45	7.91	8.37	8.84	9.30	9.77	m
Top Platform on Rung	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	
Components included to comply with Work at Height Regulations 2005 and HSE 3T Erection Method. All towers kitemarked to British Standard EN1004 (2005)																				
Castor	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	Tower rigidity considerations mean that the recommended maximum platform height of a Single Width tower is 8.0m unless it is securely tied-in to a solid structure. Please enquire for greater heights.
Adjustable Leg	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	
3 Rung Span Frame	-	2	1	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	All towers can have alternative frame height combinations if preferred.
3 Rung Ladderframe	-	2	1	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	
4 Rung Span Frame	-	-	1	2	1	-	2	3	2	1	-	4	3	2	1	-	4	3	2	
4 Rung Ladderframe	-	-	1	2	1	-	2	3	2	1	-	4	3	2	1	-	4	3	2	
5 Rung Span Frame	1	-	-	-	1	2	-	-	1	2	3	-	1	2	3	-	4	3	2	
5 Rung Ladderframe	1	-	-	-	1	2	-	-	1	2	3	-	1	2	3	-	4	3	2	
Diagonal Brace	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	-	10	9	8	
Horizontal Brace	6	6	6	10	10	10	10	10	10	10	10	14	14	14	14	-	18	17	16	
Trapdoor Platform	1	1	1	2	2	2	2	2	2	2	2	3	3	3	3	-	4	3	2	
Standard Stabiliser	-	4	4	4	4	4	4	4	-	-	-	-	-	-	-	-	-	-	-	
Telescopic Stabiliser	-	-	-	-	-	-	-	-	4	4	4	4	4	4	4	-	8	7	6	
Toeboard Assembly	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-	2	1	1	
Available in 3 tower lengths - choose from 2.0m long ; 2.5m long ; 3.0m long																				

See our excellent website at
www.ladders999.co.uk

for prices of these and our huge range
of ladders, steps, podium steps
and scaffold towers



UNITS 2 & 10 CHANCEL CLOSE TRADING ESTATE
EASTERN AVENUE **GLOUCESTER** GL4 3SN
FAX : 01452 505580
TEL: 01452 520144