


HiLyte GRP 500 INDUSTRIAL ACCESS TOWERS

Compliant with
EN1004
European
Standard



- ▶ **Non-conductive, non-sparking, electrically insulated towers for safer use in Zone 1 areas and those involving chemical and "clean" environments.**
- ▶ **Non-corrosive & non-oxidising.**
- ▶ Tested and compliant with EN1004:2004 British & European Safety standard.
- ▶ Comply with UK Work at Height Regulations 2005.
- ▶ Comply with HSE approved 3T erection method.
- ▶ Integral ladder system in end frames.
- ▶ Standard DOUBLE WIDTH and narrow SINGLE WIDTH towers available.
- ▶ Easily identifiable braces for ease of assembly.
- ▶ Impact resistant brace claws.
- ▶ Platform deck edge of GRP profile for protection.
- ▶ Maximum safe working load 400kg on Double Width & 200kg on Single Width towers.
- ▶ Normally available UK mainland in less than 7 days.
- ▶ Platform heights to 12m.
- ▶ Correct guardrail height is guaranteed when guardrail braces are fitted to the two rungs above platform level.

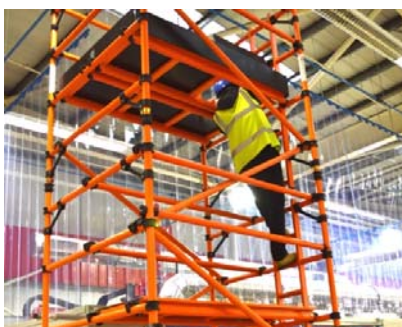

Built-in ladder access and trapdoor platforms with guardrail braces at regular intervals guarantee compliance with Work at Height Regulations and HSE approved safe erection and dismantling by the 3T system.

GRP 500 towers for clean room & chemical environments

Insulated Fibreglass towers for safer electrical & Zone 1 use



HiLyte GRP 500 INDUSTRIAL ACCESS TOWERS

DOUBLE WIDTH (1.45m wide) HiLYTE GRP 500 TOWERS - COMPONENTS LIST																			
Appx Working Height	4.2	4.7	5.2	5.7	6.2	6.7	7.2	7.7	8.2	8.7	9.2	9.7	10.2	10.7	11.2	11.7	12.2	12.7	m
Tower Height	3.2	3.7	4.2	4.7	5.2	5.7	6.2	6.7	7.2	7.7	8.2	8.7	9.2	9.7	10.2	10.7	11.2	11.7	m
PLATFORM HEIGHT	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	6.7	7.2	7.7	8.2	8.7	9.2	9.7	10.2	10.7	m
Top Platform on Rung	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	
Components included to comply with Work at Height Regulations 2005 and HSE 3T Erection Method. All towers approved to European Standard EN1004 (2004)																			
Dual Lock Castor	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	Please enquire for greater heights. Towers over 8.0m platform height are for INDOOR use only, if free-standing.
Adjustable Leg	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	
2 Rung DW G'rail Frame	1	-	-	1	1	-	-	1	1	-	-	1	1	-	-	1	1	-	
2 Rung DW Ladder Frame	1	-	-	1	1	-	-	1	1	-	-	1	1	-	-	1	1	-	
3 Rung DW Span Frame	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	
3 Rung DW Ladder Frame	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	
4 Rung DW Span Frame	1	1	2	1	2	2	3	2	3	3	4	3	4	4	5	4	5	5	
4 Rung DW Ladderframe	1	1	2	1	2	2	3	2	3	3	4	3	4	4	5	4	5	5	
2.1m Diagonal Brace	3	5	5	7	7	9	9	11	11	13	13	15	15	17	17	19	19	21	
1.8m Horizontal Brace	6	6	10	10	10	14	14	14	14	18	18	18	18	22	22	22	22	26	
1.8m Plain Platform	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
1.8m Trapdoor Platform	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	
Standard Stabiliser	4	4	4	4	4	4	4	4	-	-	-	-	-	-	-	-	-	-	
Telescopic Stabiliser	-	-	-	-	-	-	-	-	4	4	4	4	4	4	4	4	4	4	
1.8m/DW Toeboard Set	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Also available to special order in tower length 2.5m																			

SINGLE WIDTH (0.85m wide) HiLYTE GRP 500 TOWERS - COMPONENTS LIST																				
Appx Working Height	4.2	4.7	5.2	5.7	6.2	6.7	7.2	7.7	8.2	8.7	9.2	9.7	10.2	10.7	11.2	11.7	12.2	12.7	m	
Tower Height	3.2	3.7	4.2	4.7	5.2	5.7	6.2	6.7	7.2	7.7	8.2	8.7	9.2	9.7	10.2	10.7	11.2	11.7	m	
PLATFORM HEIGHT	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	6.7	7.2	7.7	8.2	8.7	9.2	9.7	10.2	10.7	m	
Top Platform on Rung	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21		
Components included to comply with Work at Height Regulations 2005 and HSE 3T Erection Method. All towers approved to European Standard EN1004 (2004)																				
Dual Lock Castor	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	Tower rigidity considerations mean that the recommended maximum platform height of a Single Width tower is 8.0m unless it is securely tied-in to a solid structure. Please enquire for greater heights. Towers over 8.0m platform height are for INDOOR use only, if free-standing.	
Adjustable Leg	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4		
2 Rung SW G'rail Frame	1	-	-	1	1	-	-	1	1	-	-	1	1	-	-	1	1	-		
2 Rung SW Ladder Frame	1	-	-	1	1	-	-	1	1	-	-	1	1	-	-	1	1	-		
3 Rung SW Span Frame	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1		
3 Rung SW Ladder Frame	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1		
4 Rung SW Span Frame	1	1	2	1	2	2	3	2	3	3	4	3	4	4	4	4	4	4		
4 Rung SW Ladderframe	1	1	2	1	2	2	3	2	3	3	4	3	4	4	4	4	4	4		
2.1m Diagonal Brace	3	5	5	7	7	9	9	11	11	13	13	15	15	17	17	19	19	21		
1.8m Horizontal Brace	6	6	10	10	10	14	14	14	14	18	18	18	18	22	22	22	22	26		
1.8m Trapdoor Platform	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6		
Standard Stabiliser	4	4	4	4	4	4	4	4	-	-	-	-	-	-	-	-	-	-		
Large Stabiliser	-	-	-	-	-	-	-	-	4	4	4	4	4	4	4	4	4	4		
Toeboard Assembly	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Also available to special order in tower length 2.5m																				

See our excellent website at
www.ladders999.co.uk

for prices of these and our huge range
of ladders, steps, podium steps
and scaffold towers



UNITS 2 & 10 CHANCEL CLOSE TRADING ESTATE
EASTERN AVENUE **GLOUCESTER** GL4 3SN
FAX : 01452 505580
TEL: 01452 520144