
" Insul8 " All-Glassfibre Safety Ladders

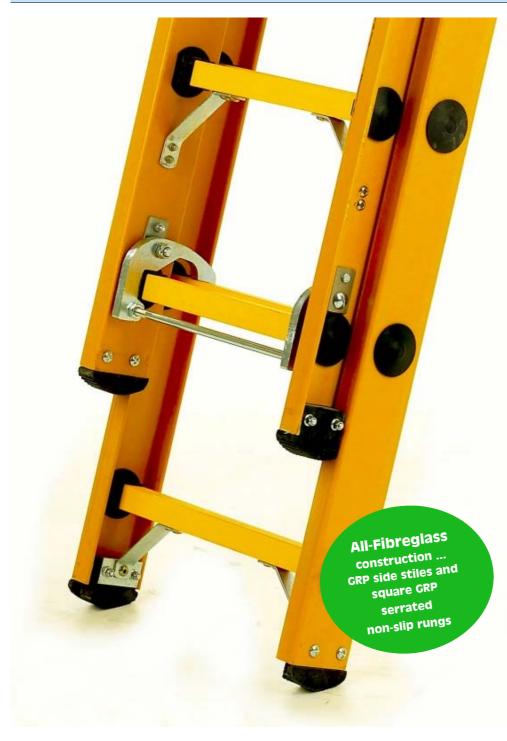

ALL glassfibre construction with GRP insulated side stiles + nonslip rungs

conforms to previous Euro safety standard

BS EN131*

with a max safe working load 150kg

Optional swivelling Octopus
Feet can be fitted at base
instead of standard rubber
bungs & optional Pole Bows at
the top on request

* For fully kitemarked certification to latest BS EN131-2 Professional safety standard with a max safe working load 150kg a base horizontal stabiliser bar must be fitted at extra cost — please advise if required

- INSUL8 ladders are constructed ENTIRELY from GRP and are the highest quality UK manufactured glass reinforced plastic ladders.
- INSUL8 ladders are highly distinctive and the finest ALL-FIBREGLASS and fully non-conductive ladders in the UK.
- The yellow side stiles are very heavy-duty 84 x 30mm channel section GRP and the non-slip serrated GRP rungs are 30 x 30mm square box section GRP.
- Special rung joints give a secure and anti-twist fixing.
- Essential for electrical installations, electrical maintenance, and chemical industries.
- INSUL8 ladders conform to previous BSEN131* standard, plus American ANSI 14-5 and ENATS 14-1.
- For fully kitemarked certification to new BS EN131-2 Professional standard a base stabiliser bar must be fitted at extra cost—please advise if required.
- INSUL8 ladders are used by every electricity company in the UK as well as many chemical, gas and electrical utilities worldwide.
- Wall runner wheels fitted at top of all extending ladders.
- Swinging gravity latch fitted to all extending ladders.
- Solid rubber feet fitted and all ladders are fully repairable - in contrast to most other brands.
- Also available with round alloy rungs instead of square GRP rungs. Please enquire for details.

01452 520144 www.**ladders999**.co.uk



" Insul8 " All-Glassfibre Safety Ladders



Optional Extra: Swivelling Octopus Feet



Optional Extra: Various Pole Bows



Optional Extra: Clamcleat & Rope Lashing tie-off without knots

code	Closed Length	Max Extended Length	Rungs per Section	Side Stile D x W	Overall Ladder Width	Appx Weight
Single Section Safety	/ Ladders					
BAFL09	2.35m / 7′ 9″	-	9	84 x 30mm	420mm	7kg
BAFL12	3.05m / 10′ 0″	-	12	84 x 30mm	420mm	9kg
BAFL14	3.55m / 11' 8"	-	14	84 x 30mm	420mm	11kg
BAFL16	4.10m / 13′ 6″	-	16	84 x 30mm	420mm	14kg
BAFL19	4.83m / 15′ 10″	-	19	84 x 30mm	420mm	16kg
Section Push-Up Sa	fety Ladders (Doubles)				
BAFD09	2.35m / 7′ 9″	4.05m / 13' 3"	9	84 x 30mm	420mm	14kg
BAFD12	3.05m / 10′ 0″	5.55m / 18' 2"	12	84 x 30mm	420mm	18kg
BAFD14	3.55m / 11' 8"	6.30m / 20' 8"	14	84 x 30mm	420mm	22kg
BAFD16	4.10m / 13′ 6″	7.55m / 24′ 9″	16	84 x 30mm	420mm	28kg
Section Push-Up Sa	fety Ladders (Triples)					
BAFT09	2.55m / 8′ 4″	5.87m / 19' 3"	9	84 x 30mm	445mm	21kg
BAFT12	3.26m / 10′ 8″	7.45m / 24′ 5″	12	84 x 30mm	445mm	27kg
Section Rope-Oper	ated Safety Ladders (D	oubles)				
BAFDR09	2.35m / 7′ 9″	4.05m / 13' 3"	9	84 x 30mm	440mm	14kg
BAFDR12	3.05m / 10′ 0″	5.55m / 18' 2"	12	84 x 30mm	440mm	18kg
BAFDR14	3.55m / 11' 8"	6.30m / 20' 8"	14	84 x 30mm	440mm	22kg
BAFDR16	4.10m / 13′ 6″	7.55m / 24′ 9″	16	84 x 30mm	440mm	28kg
Section Rope-Oper	ated Ladders (Triples)					
BAFTR09	2.55m / 8' 4"	5.87m / 19′ 3″	9	84 x 30mm	445mm	21kg
BAFTR12	3.26m / 10′ 8″	7.45m / 24′ 5″	12	84 x 30mm	445mm	27kg
ptional Extras						
вхгтост	Optional Swivelling Octopus Feet fitted at base instead of bungs					
вхрв	Optional - various Pole Bows can be fitted at top for use against poles					
BXCCR	Optional Clamcleat & Rope Lashing can be fitted at top to tie-off ladders without knots					

See our excellent website at

www.ladders999.co.uk

for details of our huge range of ladders, steps, podium steps and scaffold towers



UNITS 2 & 10 CHANCEL CLOSE TRADING ESTATE EASTERN AVENUE **GLOUCESTER** GL4 3SN

FAX: 01452 505580

TEL: 01452 520144

www.ladders999.co.uk sales@lansfordaccess.co.uk

All prices, details and specifications are subject to change without notice and are those ruling at date of order. E&OE.