
Easy Stow spring counterbalanced Loft Ladder



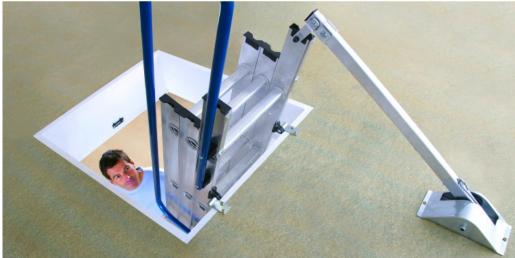

- Spring assisted 'Easy Stow' system gives total control when lowering or stowing the loft ladder.
- Operates independently of the trapdoor (not connected)
- Suitable for Floor-to-Floor Heights up to 3.0m (9'10")
- Spring assisted Blue-Seal 'Easy Stow' system gives total control when lowering or stowing the loft ladder
- Extended "In-loft" handrail for added safety when entering or leaving the loft
- Suitable for DIY installation. Includes all components and easy to follow instructions.

- Suitable for domestic use only
- ▶ Approved & kitemarked to Euro Standard EN14975 max safe load 150kg / 23.5stones.
- Please check dimensions below carefully to determine if this model will fit your aperture and loft space.

"EASY STOW" ALLOY LOFT LADDER					
	code	Min & Max FLOOR-TO-FLOOR Heights	Loft Clearance Arc (vertical x horizontal)	Minimum Trapdoor Size W x L	Appx Weight
	ALOF6	7' 0" - 9' 10" 2.13m - 3.00m	28" x 44" 0.71m x 1.12m	15" x 18" 381mm x 463mm	10.0kg

See our excellent website at

www.ladders999.co.uk

for prices of these and our huge range of ladders, steps, podium steps and scaffold towers UNITS 2 & 10 CHANCEL CLOSE TRADING ESTATE
EASTERN AVENUE GLOUCESTER GL4 3SN

FAX: 01452 505580

TEL: 01452 520144

www.ladders999.co.uk sales@lansfordaccess.co.uk

All prices, details and specifications are subject to change without notice and are those ruling at date of order. E&OE.