



## Galvanised Underground **Shaft Ladders**

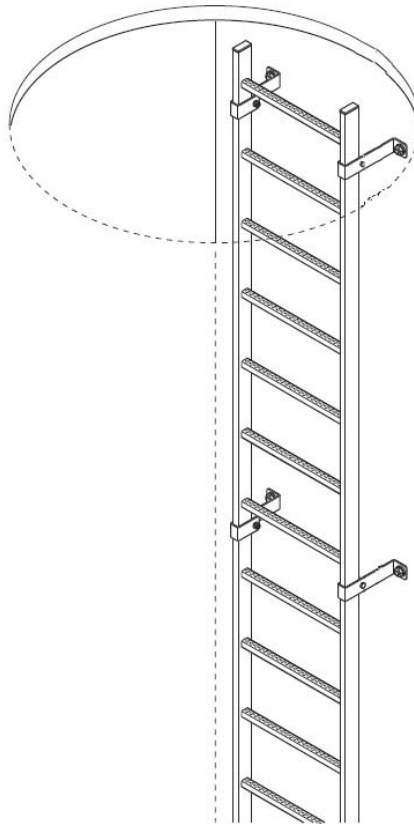

- ▶ Make shaft entry SAFER with these robust galvanised steel ladders.
- ▶ Underground SHAFT LADDERS of hot-dip galvanised steel.
- ▶ Ladders 400mm wide internal (440mm overall) with punched, non-slip square rungs 29 x 29mm.
- ▶ Supplied with galvanised 150mm stand-off wall brackets (pairs).
- ▶ Option for 1.0m high Retractable Safety Grab Rail at the top for safer shaft entry.
- ▶ Four ladder lengths which can be cut easily to exact length required on site. Recommended length is depth of shaft minus 280mm.
- ▶ Lengths over 5m must be fitted with a fall arrestor device.
- ▶ Rung-rung distance 280mm & side stile dimensions 50 x 20mm.
- ▶ Other options available include stainless steel & GRP ladders, narrower ladders 300mm wide internal, adjustable wall brackets, other safety posts & rails, ground plates (floor mounting is not mandatory). Please enquire.
- ▶ FREE DELIVERY mainland UK

Retractable Safety Grab Rail




Wall Bracket pairs

### Ladder kits include ...

Galvanised Ladder

Wall Bracket pairs

Retractable Safety Grab Rail (optional)

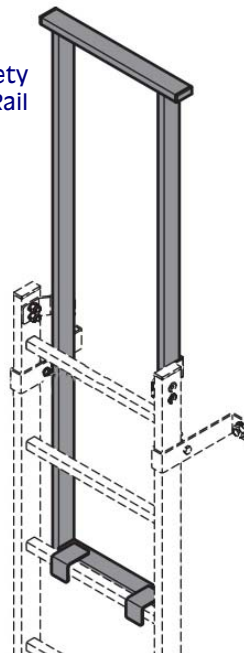


**01452 520144**

**[www.ladders999.co.uk](http://www.ladders999.co.uk)**



# Galvanised **Shaft Ladders**

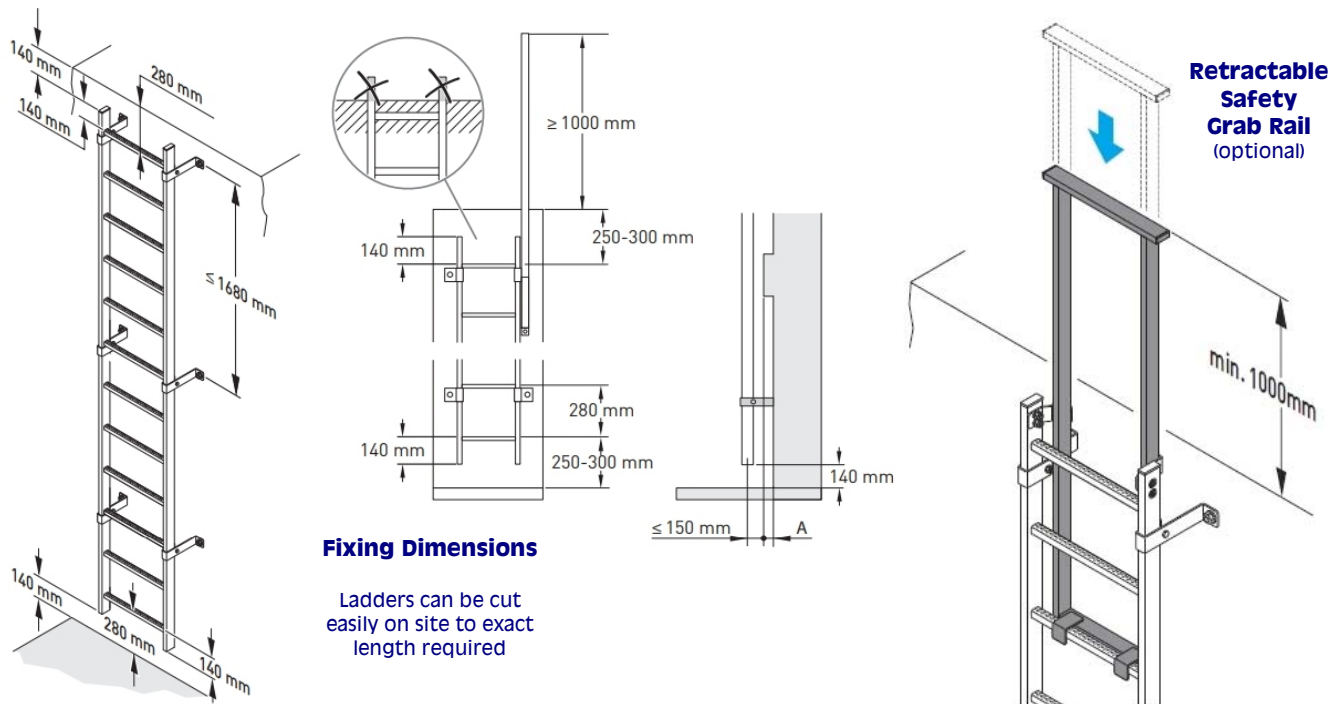

## Galvanised Steel SHAFT LADDERS - kits include wall bracket pairs (cut ladders easily on site to exact length)

code	Description	No. Rungs	Ladder Width internal/overall	Side Stile D x W	Appx Weight
<b>Galvanised SHAFT LADDERS - ladder &amp; wall brackets only</b>					
<b>ZSTLB19</b>	Heights up to 1.96m - ladder & wall brackets only	7	400mm / 440mm	50 x 20mm	12kg
<b>ZSTLB25</b>	Heights up to 2.52m - ladder & wall brackets only	9	400mm / 440mm	50 x 20mm	15kg
<b>ZSTLB36</b>	Heights up to 3.64m - ladder & wall brackets only	12	400mm / 440mm	50 x 20mm	24kg
<b>ZSTLB44</b>	Heights up to 4.48m - ladder & wall brackets only	16	400mm / 440mm	50 x 20mm	29kg

## Galvanised SHAFT LADDERS - ladder & wall brackets + RETRACTABLE SAFETY GRAB RAIL

<b>ZSTLR19</b>	Heights up to 1.96m - ladder & wall brackets + retractable safety grab rail	7	400mm / 440mm	50 x 20mm	19kg
<b>ZSTLR25</b>	Heights up to 2.52m - ladder & wall brackets + retractable safety grab rail	9	400mm / 440mm	50 x 20mm	22kg
<b>ZSTLR36</b>	Heights up to 3.64m - ladder & wall brackets + retractable safety grab rail	12	400mm / 440mm	50 x 20mm	31kg
<b>ZSTLR44</b>	Heights up to 4.48m - ladder & wall brackets + retractable safety grab rail	16	400mm / 440mm	50 x 20mm	37kg

### Useful info .....

Recommended ladder length on site is depth of underground shaft minus 280mm (140mm clear at top & bottom).  
 Floor mounting brackets available but floor fixing is not mandatory.  
 Adjustable wall brackets available to suit off-set in walls.  
 Ladder lengths over 5.0m must be fitted with a fall arrest device.

**FREE DELIVERY** mainland UK & normally in UK stock.

See our excellent website at  
**[www.ladders999.co.uk](http://www.ladders999.co.uk)**

for details of our huge range  
 of ladders, steps, podium steps  
 and scaffold towers



UNITS 2 & 10 CHANCEL CLOSE TRADING ESTATE  
 EASTERN AVENUE **GLOUCESTER** GL4 3SN  
 FAX : 01452 505580  
**TEL: 01452 520144**

**[www.ladders999.co.uk](http://www.ladders999.co.uk)** [sales@lansfordaccess.co.uk](mailto:sales@lansfordaccess.co.uk)

All prices, details and specifications are subject to change without notice and are those ruling at date of order. E&OE.