

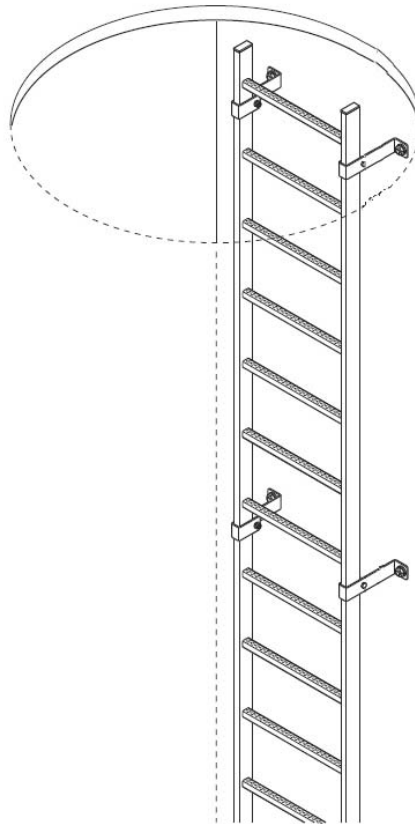


Krause Galvanised Underground **Shaft Ladders**




- ▶ Make shaft entry SAFER with these robust galvanised steel ladders.
- ▶ Underground SHAFT LADDERS of hot-dip galvanised steel.
- ▶ Ladders 400mm wide internal (440mm overall) with punched, non-slip square rungs 29 x 29mm.
- ▶ Supplied with galvanised 150mm stand-off wall brackets (pairs).
- ▶ Option for 1.0m high Retractable Safety Grab Rail at the top for safer shaft entry.
- ▶ Four ladder lengths which can be cut easily to exact length required on site. Recommended length is depth of shaft minus 280mm.
- ▶ Lengths over 5m must be fitted with a fall arrestor device.
- ▶ Rung-rung distance 280mm & side stile dimensions 50 x 20mm.
- ▶ Other options available include stainless steel & GRP ladders, narrower ladders 300mm wide internal, adjustable wall brackets, other safety posts & rails, ground plates (floor mounting is not mandatory). Please enquire.
- ▶ FREE DELIVERY mainland UK

Retractable Safety Grab Rail

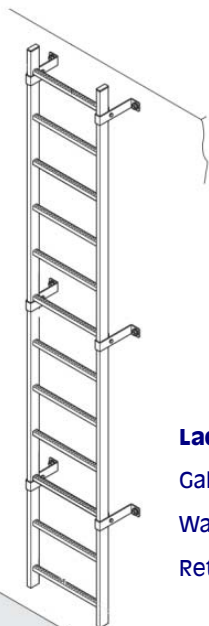

Wall Bracket pairs

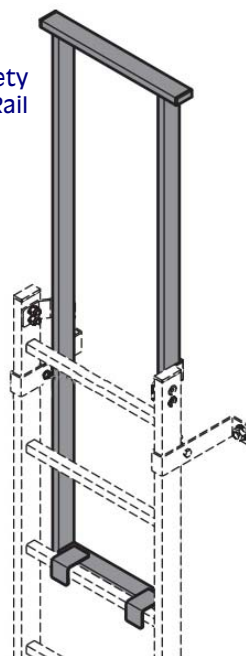



Ladder kits include ...

- Galvanised Ladder
- Wall Bracket pairs
- Retractable Safety Grab Rail (optional)

01452 520144
www.ladders999.co.uk




Krause Galvanised **Shaft Ladders**

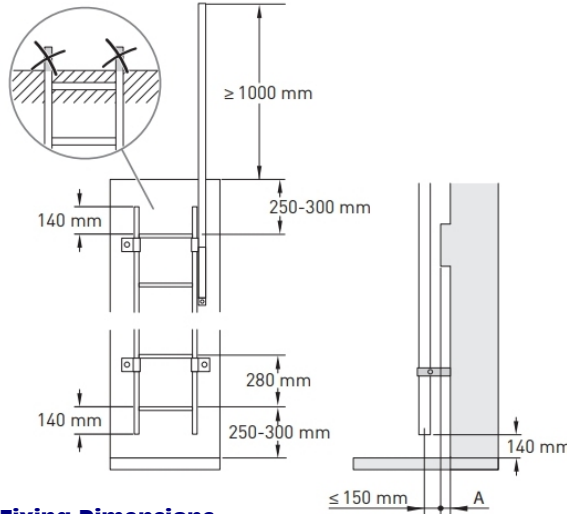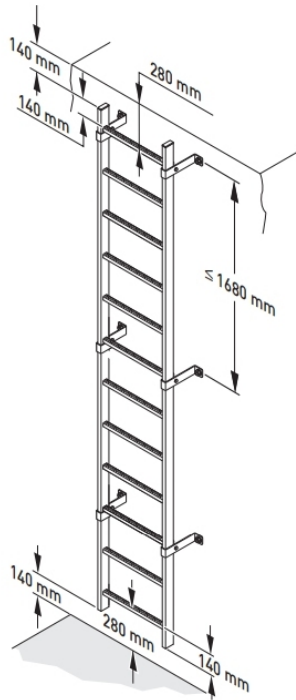

Fixing Dimensions

Ladders can be cut easily on site to exact length required

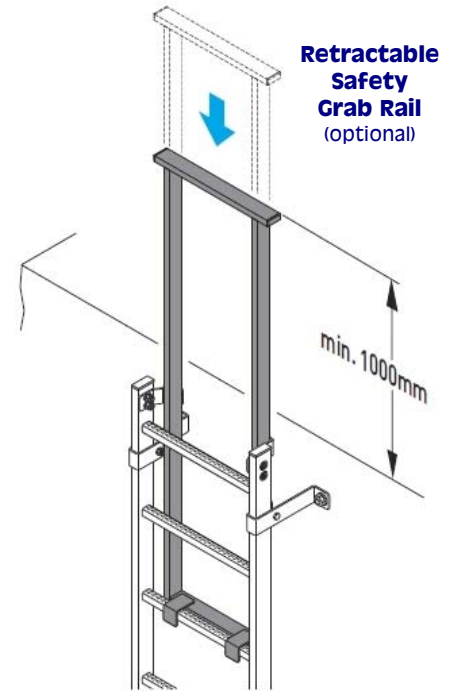

Retractable Safety Grab Rail
(optional)

Galvanised Steel SHAFT LADDERS - kits include wall bracket pairs (cut ladders easily on site to exact length)

code	Description	No. Brackets	Ladder Width internal/overall	Side Stile D x W	Appx Weight
Galvanised SHAFT LADDERS - ladder & wall brackets only					
KGSO196	Heights up to 1.96m - ladder & wall brackets only	4	400mm / 440mm	50 x 20mm	kg
KGSO280	Heights up to 2.80m - ladder & wall brackets only	6	400mm / 440mm	50 x 20mm	kg
KGSO364	Heights up to 3.64m - ladder & wall brackets only	6	400mm / 440mm	50 x 20mm	kg
KGSO476	Heights up to 4.76m - ladder & wall brackets only	10	400mm / 440mm	50 x 20mm	kg
KGSO560	Heights up to 5.60m - ladder & wall brackets only	12	400mm / 440mm	50 x 20mm	kg
Galvanised SHAFT LADDERS - ladder & wall brackets + RETRACTABLE SAFETY GRAB RAIL					
KGSH196	Heights up to 1.96m - ladder & wall brackets + retractable safety grab rail	4	400mm / 440mm	50 x 20mm	kg
KGSH280	Heights up to 2.80m - ladder & wall brackets + retractable safety grab rail	6	400mm / 440mm	50 x 20mm	kg
KGSH364	Heights up to 3.64m - ladder & wall brackets + retractable safety grab rail	6	400mm / 440mm	50 x 20mm	kg
KGSH476	Heights up to 4.76m - ladder & wall brackets + retractable safety grab rail	10	400mm / 440mm	50 x 20mm	kg
KGSH560	Heights up to 5.60m - ladder & wall brackets + retractable safety grab rail	12	400mm / 440mm	50 x 20mm	kg
Useful info					
Recommended ladder length on site is depth of underground shaft minus 280mm (140mm clear at top & bottom). Floor mounting brackets available but floor fixing is not mandatory. Adjustable wall brackets available to suit off-set in walls. Ladder lengths over 5.0m must be fitted with a fall arrest device.					
FREE DELIVERY mainland UK & normally in UK stock.					

See our excellent website at
www.ladders999.co.uk

for details of our huge range
of ladders, steps, podium steps
and scaffold towers



UNITS 2 & 10 CHANCEL CLOSE TRADING ESTATE
EASTERN AVENUE **GLOUCESTER** GL4 3SN
FAX : 01452 505580
TEL: 01452 520144